

NVR

8/16 CH PoE NVR

8MP/6MP/5MP/4MP/3MP/1080P/720P HD PoE NVR



TD-3108H2-8P-B2-B

TD-3116H2-16P-B2-B



This series of products supports 8/16 CH 8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P high definition IP video input, which adopts the advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system.

This series integrates with 8/16 PoE network ports and supports 8/16CH IPC direct connection to NVR, simultaneous 8/16 CH playback and 4K ultra high definition display. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.



en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn

Specifications

Model		TD-3108H2-8P-B2-B	TD-3116H2-16P-B2-B
System	OS	Embedded Linux	
Video	Network Input	8 CH IPC input	16CH IPC input
	Network Input Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF	
	Output	HDMI × 1 : 3840 × 2160 / 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA: 1920 × 1080 / 1280 × 1024 / 1024 × 768	
	Screen Display Mode	1/4 / 6/8/9	1/4 / 6/8/9/13/16
Audio	Compression	H.265S / H.265+ / H.265 / H.264	
	Network Input	8 CH IPC audio input	16 CH IPC audio input
	Local Input	RCA × 1 (for two-way audio)	
	Local Output	RCA × 1	
Record	Compression	G.711(U/A)	
	Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF	
	Frame Rate	NTSC:30fps; PAL:25fps	
	Number of Channels	2CH	
Cloud Storage	Record	Resolution: 1080P/720P	
	Frame Rate	15fps	
	Simultaneous Playback	Max. 8 CH	Max. 16 CH
	Search	Time slice / time / event / tag / smart search	
Decoding Capability	Function	Play, pause, FF, FB, digital zoom, etc.	
	Live View/Playback	Non-AI Mode: 1×8MP@30fps/4×4MP@30fps/8×720P@30fps AI Mode: 1×8MP@30fps/4×3MP@30fps/8×720P@30fps	Non-AI Mode: 1×8MP@30fps/4×4MP@30fps/16×720P@30fps AI Mode: 1×8MP@30fps/4×3MP@30fps/9×720P@30fps/16×D1@30fps
	Mode	Manual, sensor, motion, exception, smart events	
	Input	Supports IPC alarm input	
Alarm	Output	Supports IPC alarm output	
	Triggering	Record, snap, preset, e-mail, etc.	
	Interface	RJ 45 × 1 (10/100/1000Mbps)	
	Protocol	TCP / IP, IPv4, IPv6, UDP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, HTTP, SMTP, HTTPs, 802.1x, RTSP, RTP, RTCP, FTP, WebSocket, SNMP, IGMP, ONVIF	
Network	Incoming/Outgoing Bandwidth	80/80 (Mbps)	160/160(Mbps)
		*When the AI function of the IPC is enabled, the actual incoming bandwidth(max. bitrate) is more than the set value in the NVR.	
	Client Connection	Max. 64 users access	
	Face Detection Performance (AI by IPC)	8 CH	16 CH
Face	Face Detection Performance (AI by NVR)	2 CH (2MP) or 1 CH (4MP)	
	Face Match Performance	No	
	Statistical Graph of Information	Bar graph	
	Statistical Mode of Information	Statistics by day, week, month, quarter as well as customized time period	
Perimeter Protection	Human/Vehicle Classification (AI by IPC)	8 CH	16 CH
	Human/Vehicle Classification (AI by NVR)	2 CH (2MP) or 1 CH (4MP)	
	Video Metadata	Human/Vehicle Attribute Analysis (AI by IPC)	
	Yes		
Other Functions	Fisheye	Supports fisheye dewarping via Web Client and mobile APP	
	Plate Recognition (AI by IPC)	Yes	
	Mobile Device	OS	
	iOS, Andriod		

*AI mode: support AI by NVR, but not support cloud storage


Non-AI mode (default mode): support cloud storage, but not support AI by NVR

Storage	HDD Interface	SATA3.0 × 2, max 10T	
Backup	Local Backup	U disk, USB mobile HDD	
	Network Backup	Yes	
Port	USB	USB 2.0 × 2	
	Remote Controller	Optional	
PoE	PoE Ports	100M RJ45 × 8	100M RJ45 × 16
	Standards	IEEE802.3AF/AT	
	Output Power	≤ 90W	≤ 150W
	Power Supply	DC 48V/2.5A	DC 48V/3.75A
Others	Consumption	≤ 10W (without HDD)	
	Dimensions (mm)	380 × 268 × 45 (W × D × H)	
	Working Environment	-10 ~ 50 °C, 10% ~ 90% humidity	
	Certificate	CE, FCC	
	Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE	

Features


- Support 8/16 CH 8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF IP video input
- Adopt standard H.265 and H.264 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timed / motion / sensor / POS / AI recording
- Playback : 8/16 CH simultaneous playback
- Search : time slice, time, event, tag, smart search
- Support multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video exception, etc.
- Support POS information overlay on live view and playback
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via Web or CMS : preview, playback, backup, PTZ and configuration
- 8/16 PoE network ports; IPC can be directly connected to NVR; PoE power supply supported
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS

Dimensions

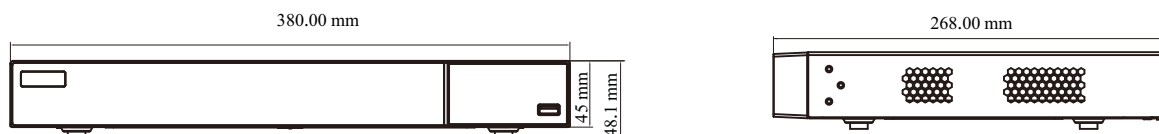

Rear Panel

TD-3108H2-8P-B2-B

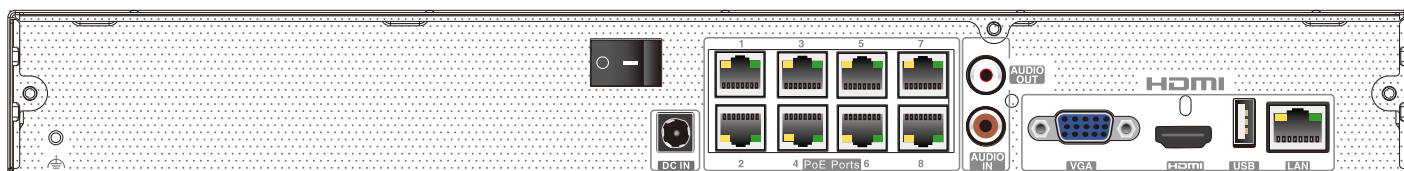

TD-3116H2-16P-B2-B

